

Hennes-Johnson - 4520 Cold Process

The **Model 4520** Cold Process sprayer from Hennes-Johnson represents the roofing industry standard for the airless application of modified bitumen adhesives, straight cut-back asphalts, asphalt emulsions, and water and solvent based elastomeric coatings. Rated **4500 psi** at **5 gpm** and powered by **Honda's 630 cc** (20hp) engine, the 4520 stands ready to conquer the challenges of your toughest spray application needs.

Viscount II Hydraulic Motor

- > Reciprocating anti-stall design
- > Proven and reliable component life

Direct Immersion Lift Tower

- > Maximizes draw potential.
- > Hydraulic powered
- > Positive lock

Dashboard Controls

- > Operator friendly
- > Fluid pressure gauge



Xtreme Pump

- > 4500 psi @ 5gpm
- > Field serviceable with minimum tool requirements

Honda 630cc Engine

- > Electric Start
- > Low oil engine shut-down
- > Six gallon fuel cell

Auxiliary Hydraulic Pressure Port


- > Power hydraulic hose reels, mixers, and transfer pumps.
- > Quick connect couplings.



4520 Xtreme Advantage Displacement Pump

Downtime from fluid contamination entering the displacement pump costs you time and money. In the past, the pump had to be removed from the sprayer and brought to a mechanic shop where it was further disassembled, cleaned, repaired, sent back to the job site, re-installed onto the sprayer and then put back into service.

*With the innovative **XTREME DISPLACEMENT PUMP** featured on the **Model 4520**, average downtime is reduced to a minimum. The advanced design pump configuration allows the operator to disassemble, service, reassemble, and return to production without having to remove the pump from the sprayer. All this in minutes instead of hours and with only a few common hand tools.*

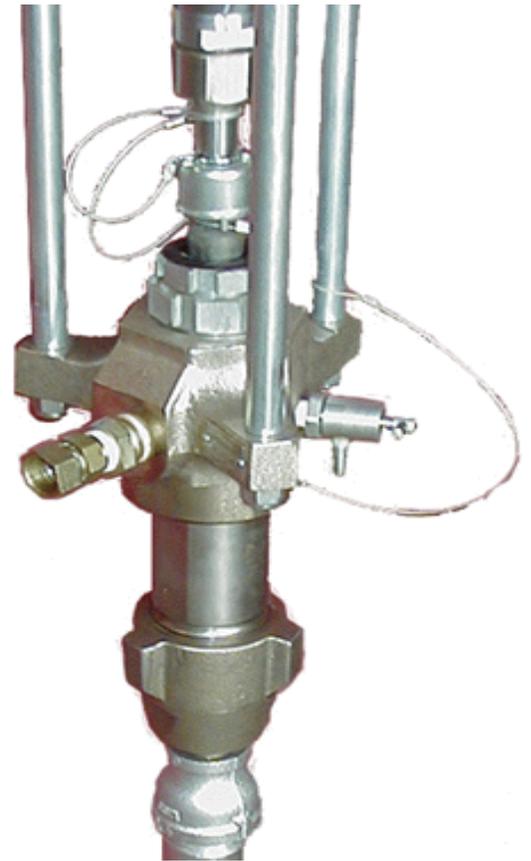

Technical Data

- > **HJ4520X** - part number bare.
- > **HJ4520X-861** - part number complete with 215' hose and pole gun package.
- > 630 cc Honda electric start, gasoline engine with low oil shut-down.
- > Fuel tank capacity - 5 gallons
- > Production - 1 gun to .099, 2guns to .051
3 guns to .027.
- > Fluid pump rating - 4,500psi @ 5gpm
- > In-line heater ready with 12v quick coupler.
- > Shipping weight - 960lbs bare , 1,250lbs complete package. NMFC class 85.
- > Shipping dimensions L72" x W42 x H70.